

# Run 2500

For sliding gates weighing up to 2500 kg

## Suitable to operate in extreme conditions, in systems for intensive use.

Ventilated motor with electromechanical limit switch (RUN2500I).

**Easy to install:** the BlueBUS system enables connections by means of just two wires between the control unit and up to 15 control safety and signalling devices.

**Safe:** the acceleration settings (at the start of the manoeuvre) and the deceleration settings (at the end of the manoeuvre) are precise and reliable.

**Advanced temperature sensor:** Run is able to manage force, adapting it to the different climatic and environmental conditions, while adapting the thermal cut-out protection and intensity of self-ventilation, depending on the temperature reading.

**Master/slave selection:** for automatic synchronisation even of 2 motors, allowing automation of sliding gates with two opposing leaves.

**Practical and functional:** the control unit (and inverter on version RUN2500I), housed inside Run, can be simply connected by means of the practical connector guide.

**Silent:** gear motor on bearings.

### RUN2500I version with built-in inverter

**Perfect movement:** the inverter enables the power supply and drive of the 3-phase motor with single-phase current at 230 Vac, acting on the frequency to adjust speed of the automation from a minimum of 8.2 m/min to maximum 15.4 m/min. In the automation deceleration phase, the inverter, which dialogues with the control unit, increases the torque, thus improving performance and reducing the risk of the automation blocking on impact with obstacles.



Compartment for control unit  
protected by removable box

Pressure die-cast aluminium base  
and release, with epoxy painting

## COMMON ACCESSORIES



**IT4WIFI**  
Smart Wi-fi interface to manage gates and garage doors by smartphone.

Pc./Pack 1



**RUA1**  
Spare control unit for RUN1800/1800P and RUN2500/2500P.

Pc./Pack 1



**RUA2**  
Spare control unit, for RUN2500I.

Pc./Pack 1



**RUA3**  
Spare inverter for RUN2500I.

Pc./Pack 1



**ROA7**  
M4 rack, zinc coated, 22x22x1000 mm.

Pc./Pack 10



**ROA8**  
M4 rack, 30x8x1000 mm, zinc coated with spacers and screws.

Pc./Pack 10



**ROA81**  
M6 rack, 30x30x1000 mm, zinc coated, to be coupled with RUA12.

Pc./Pack 10



**RUA12**  
12-teeth pinion, module 6, to be coupled with rack ROA81. The Run automation is supplied with a module 4 pinion to be used with the standard racks ROA7 and ROA8.

Pc./Pack 1



**TS**  
Signboard.


Pc./Pack 1

## TECHNICAL SPECIFICATIONS

Code	Description	Pack/Pallet
<b>RUN2500I</b>	Irreversible, 230 Vac, with built-in control unit and inverter, with electromechanical limit switches, for sliding gates weighing up to 2500 kg	12

Code	RUN2500/2500P	RUN2500I
<b>ELECTRICAL DATA</b>		
Power supply (Vac/Hz)	230/50*	230/50-60
Absorption (A)	3.8	3.7
Power (W)	870	650
<b>PERFORMANCE DATA</b>		
Speed (m/s)	0.17	0.26
Force (N)	1390	1660
Work cycle (cycles/hour)	42	56
<b>DIMENSIONAL AND GENERAL DATA</b>		
Protection level (IP)	44	
Working temp. (°C Min/Max)	-20 ÷ +50	
Dimensions (mm)	400x255x390 h	
Weight (kg)	24.5	25

## DIMENSIONS

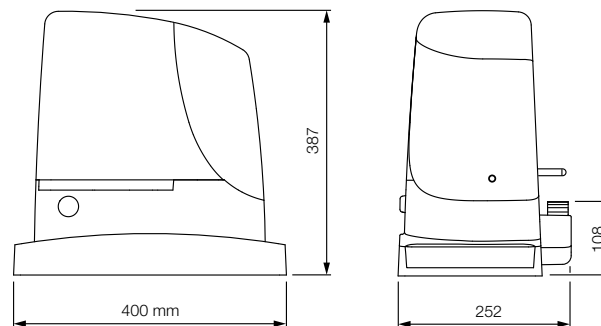

## COMPATIBILITY TABLE WITH CONTROL SYSTEMS AND ACCESSORIES

Code	receiver		transmitter				photocells								flashing light						
	Built-in*	OXI	ERA INTI	ERA ONE	ERA FLOR	NICEWAY	EPS	EPM	EPL	EPFB	EPMB	EPLB	EPWOW	EPWOR	F210	FT210	F210B	FT210B	ELAC	ELDC	WLT
<b>RUN1800/1800P</b>		•	•	•	•	•					•	•	•	•			•	•	•	•	•
<b>RUN2500/2500P</b>		•	•	•	•	•					•	•	•	•			•	•	•	•	•
<b>RUN2500I</b>		•	•	•	•	•					•	•	•	•			•	•	•	•	•

\* Radio receiver incompatible with Opera system